

# An Experimental Study on Self Compacting Concrete with Partial Replacement of Cement with Silica Fume and Flyash

**S.SaiCharan, S. Sai Durga Harish\*, Ch.Naga Raju, P.S.V.U. Mahesh Babu, V.Saran, T.V.R.Subrahmanyam Sai**

*Gudlavalleru Engineering College, Gudlavalleru, A.P, India*

---

## ABSTRACT

Click here and insert your abstract text. Concrete is a mixture of cement, fine aggregate, coarse aggregate, water. Concrete plays a vital role in the development of infrastructure i.e., buildings, industrial structures, bridges etc., leading to utilization of large quantity of concrete. On the other side cost of concrete is attributed to the cost of its ingredients which is expensive. Due to this reason alternative materials are being chosen for economical production of concrete. In this project cement is partially replaced with silica fume and fly ash. Substantial energy can result when industrial by products like silica fume and fly ash are used as partial replacements for the energy intensive Portland cement. Silica fume (SF) is a very fine powder consists of spherical particles of mean diameter about 0.15 microns, with a very high specific surface area. Fly ash (FA) is a solid waste generated by industry. In the present study the mechanical properties of concrete at 7 and 28 days are tested by partially replacing cement with silica fume and fly ash of different percentages.

---

Keywords: Silica Fume, Flyash, Cement, Self-Compacting Concrete, Split Tensile Strength, Compressive Strength.

---

## 1. Introduction

The production of one metric tonne of cement leads to the emission of one metric tons of CO<sub>2</sub>, which is a powerful greenhouse gas responsible for the global warming. One way of reducing this environmental problem is to reduce the consumption or production of cement. Since the cement is the basic material which is used in construction industry, it is essential to find the suitable material for the replacement of cement. The flyash obtained from thermal power plant sand silica fume produced from elemental silicon can be used as partial replacement of the cement.

When compared to conventional concrete Self Compacting Concrete (SCC) is a relatively new type of concrete with high flowability and cohesiveness. SCC may be used in pre-cast applications or for concrete placed on site. (SCC) requiring no compaction work at site or concrete plans it has been developed in Japan to improve the durability and uniformity of concrete in 1988. There is no standard method for SCC mix design and many academic institutions, concrete and construction chemical manufacturing companies and ready-mix concrete producers and contracting companies have developed their own proportioning methods by following EFNARC guidelines (2005).

---

## 2. Aim of the Project

The main aim of the project is to study the strength properties of concrete mix of M30 grade on partial replacement of cement with silica fume and fly ash with varying percentages.

\* Corresponding author. Tel.: 8328675388.

E-mail address: Harishnaidusalamkayala@gmail.com

---

### 3. Materials Used

a) **Cement:** Ordinary Portland Cement of 53 grade evaluation adjusting to both the necessities of IS:12269 and ASTM C 642-82 sort I was utilized.

b) **Fine aggregate:**



The test results of fine aggregates are as follows

| S.No. | Test             | Natural sand |
|-------|------------------|--------------|
| 1     | Sieve analysis   | Zone II      |
| 2     | Fineness modulus | 2.60         |
| 3     | Specific gravity | 2.44         |

c) **Coarse aggregate:**



The test results of coarse aggregates are as follows

| Property         | Result  |
|------------------|---------|
| Type             | Crushed |
| Specific gravity | 2.67    |
| Fineness modulus | 7.01    |

**d) Silica fume:**

Silica fume generally used as mineral admixture. The main aim of the project is to study the strength properties of concrete mix of M30 grade on partial replacement of cement with silica fume and fly ash with varying percentages. The specific gravity of silica fume is 2.63. Silicafume is also called micro silica. Its usage in concrete widely increased in present days.

| S.No | Particulars of tests | Test results | Requirements as per IS codes       |
|------|----------------------|--------------|------------------------------------|
| 1    | Standard consistency | 28%          | IS 4031-1988(Part-4)               |
| 2    | Fineness             | 5%           |                                    |
| 3    | Specific gravity     | 3.12         |                                    |
| 4    | Setting time         |              |                                    |
|      | (a)Initial           | 42 minutes   | As per 12269-2013,30mins,Minimum   |
|      | (b)Final             | 450 minutes  | As per 12269-2013,600 min. Maximum |



**e) Fly Ash:**

Fly ash is generated by the combustion of coal at thermal power plants as a by-product. Fly ash is also named as pulverized fuel ash. The specific gravity of fly ash is 2.75.




---

#### 4. Concrete Mix Proportion

The steps involved in the design of concrete mix as per IS: 10262-2009, IS: 456-2000.

Stipulations for proportioning

Grade designation : M30.  
 Type of cement : OPC 53 grade  
 Size of aggregate : 10 & 12 nm  
 Degree of supervision : Good  
 Minimum cement content : 320 kg/m<sup>3</sup>  
 Workability : 50-75 mm (slump)  
 Exposure condition : Severe  
 Maximum water cement : 0.40  
 Ratio  
 Chemical add mixture : Super Plasticizer

Mix proportion of concrete is

Cement : F.A : C.A = 1 : 2.46 : 2.16

---

#### 5. Results and discussions

The study is carried out to find the compressive strength and split tensile strength.

##### 5.1 Compressive Strength (CS)

| S.No. | %S.F | %F.A | C.S at 7 days | C.S at 28 days |
|-------|------|------|---------------|----------------|
| 1.    | 0    | 0    | 25.55         | 38.4           |
| 2.    | 5    | 10   | 26.84         | 38.9           |
| 3.    | 5    | 20   | 27.5          | 40.26          |
| 4.    | 5    | 30   | 28.2          | 42.42          |
| 5.    | 10   | 10   | 28.86         | 44.1           |
| 6.    | 10   | 20   | 29.26         | 45.5           |
| 7     | 10   | 30   | 28.48         | 43.9           |
| 8     | 15   | 10   | 27.6          | 44.1           |
| 9.    | 15   | 20   | 28.24         | 43.8           |
| 10    | 15   | 30   | 27.5          | 42.8           |

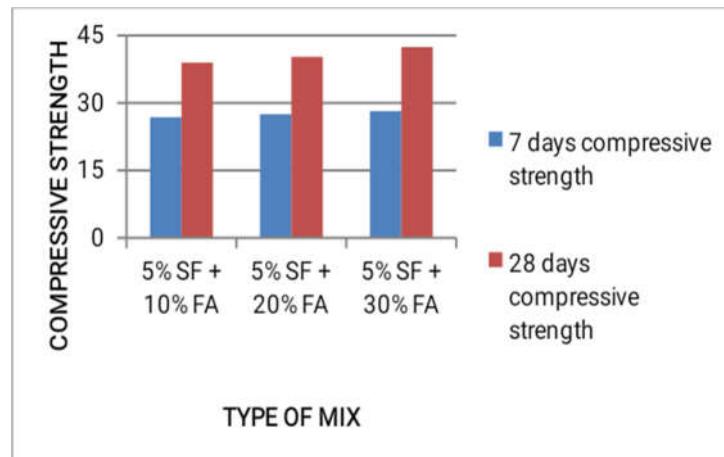


Figure : Graph showing compressive strength at 5 % silica fume and varying percentages of fly ash.

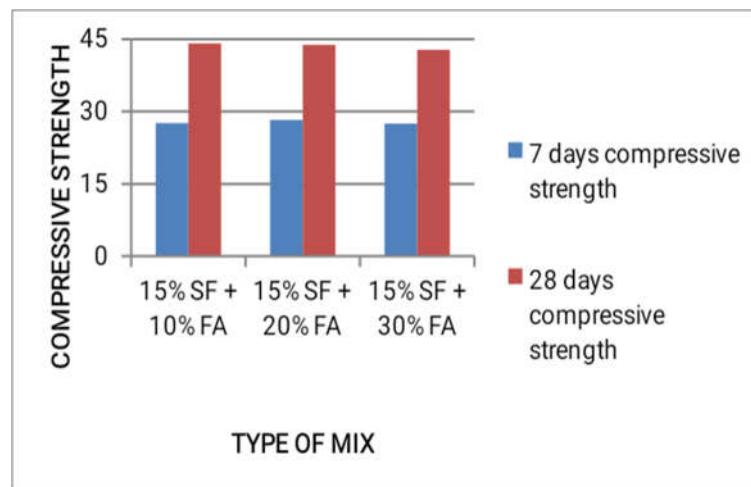


Figure: Graph showing compressive strength at 15 % silica fume and varying percentages of fly ash.

### 5.2. Split tensile strength (STS)

| S.No.     | %SF       | %FA       | STS at 28 days |
|-----------|-----------|-----------|----------------|
| 1.        | 0         | 0         | 3.25           |
| 2.        | 5         | 10        | 3.30           |
| 3.        | 5         | 20        | 3.41           |
| 4.        | 5         | 30        | 3.60           |
| 5.        | 10        | 10        | 3.74           |
| <b>6.</b> | <b>10</b> | <b>20</b> | <b>3.86</b>    |
| 7.        | 10        | 30        | 3.72           |
| 8.        | 15        | 10        | 3.74           |
| 9.        | 15        | 20        | 3.71           |
| 10.       | 15        | 30        | 3.63           |

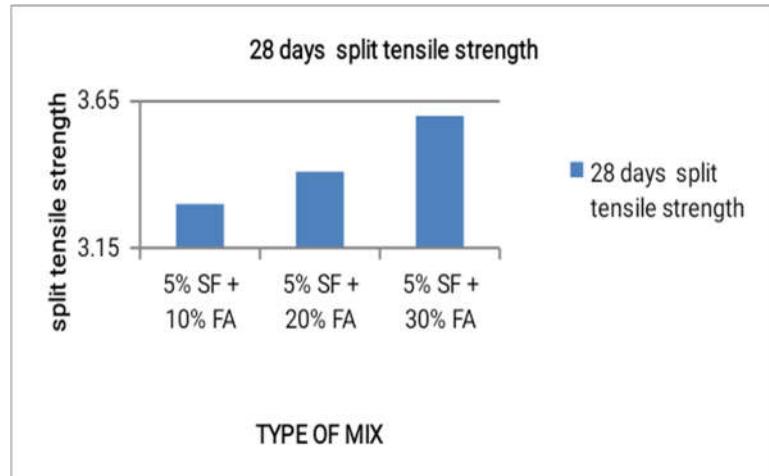


Figure: Graph showing split tensile strength at 5% silica fume and varying percentages of fly ash.

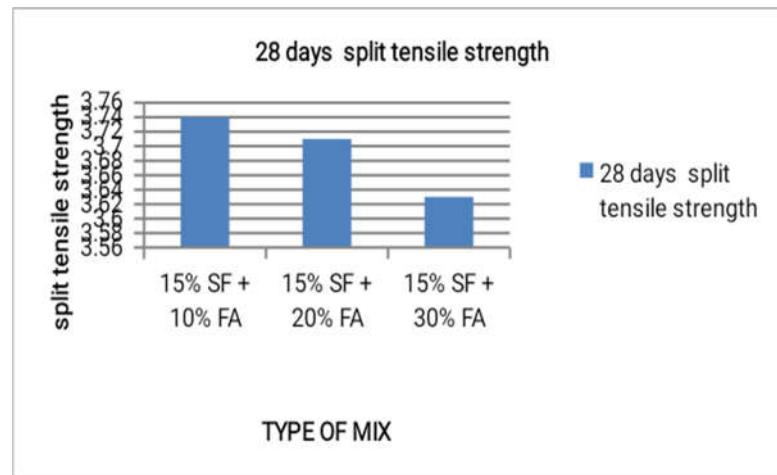


Figure: Graph showing split tensile strength at 15% silica fume and varying percentages of fly ash

## 6. Conclusion

After the analysis of the result of the experimental programme the following conclusions were arrived. By the partial replacement of cement with silica fume and fly ash the mechanical properties of concrete have increased. The optimum compressive strength when cement is partially replaced with 10%silica fume and 20% flyash is obtained  $45.5\text{N/mm}^2$ .The optimum split tensile strength when cement is partially replaced with10% silica fume and 20%fly ash is obtained  $3.86\text{N/mm}^2$ .

## REFERENCES

- [1]. Prof. Vishal s. Ghutke, prof. Pranita s. Bhandari (2014) "Influence of silica fume on concrete",IOSR Journal of Mechanical and Civil Engineering(IOSR- JMCE),e-ISSN:2278-1684,p-ISSN:2320-334X,PP44-47.
- [2]. N.K.Amudhavallietal.,(2012)"Effect of silica fume on strength and durability parameters of concrete", International Journal of Engineering Sciences & Emerging Technologies, August 2012.ISSN:2231-6604 Volume3, Issue1,pp: 28-35
- [3]. Dilip Kumar Singha Roy (2012) "Effect of Partial Replacement of Cement by Silica Fume on Hardened Concrete",International Journal of Emerging Technology and Advanced Engineering (ISSN2250-2459,Volume2,Issue8, August2012).

- [4]. Debabrata Pradhan,D.Dutta (2013)“Influence of Silica Fume on Normal Concrete”,International Journal of Engineering and Application,Vol.3,Issue 5,Sep Oct 2013,pp.79-82.
- [5]. Ankit Kumar,N Kisku,(2016)“Effect of silica fume and fly ash partial replacement of cement on strength of concrete”,International Journal of Innovative Research in Science, Engineering and Technology,Vol.5,Issue10, October 2016
- [6]. Ratod Vinod Kumar,Koudagani Venkatesh(2014) “Compressive Strength of Concrete by Replacing Cement with Silica fume for M20 Grade”, International Journal of Science and Research,Volume 5 Issue 4,April 2016.